


Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client :	Flowcrete Au			Test Num		20-00232		
	Unit 2, 41 Deakin Street Brendale QLD 4500			Issue Date Print Date		2/07/2020 2/07/2020		
Sample Description		Clients Ref : "Deckshield ED Rapide" Product applied by Flowcrete onto fibre cement cement board						
		Nominal Mass per Unit Area/Der Nominal Thickness : Appro	nsity : Approx ox: 3-4mm	:: 3-4kg/m2				
/ISO 9239.1-2003		Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source						
		Date of Sample Arrival 07/05/2020						
		Date Tested 02/07/2020						
		Date Tested		02/07/2020				
		Date Tested CHF Value	1	02/07/2020 2	3	Mean		
			1 2.7		3 2.6	Mean 2.7	kW/m²	
		CHF Value		2			kW/m²	
		CHF Value Non Directional	2.7	2 2.7	2.6	2.7	kW/m² kW/m²	
		CHF Value Non Directional HF-30 Value	2.7 1	2 2.7 2	2.6 3	2.7 Mean	kW/m²	
		CHF Value Non Directional HF-30 Value Non Directional	2.7 1 5.2	2 2.7 2 4.7	2.6 3 4.9	2.7 Mean 4.9	kW/m²	

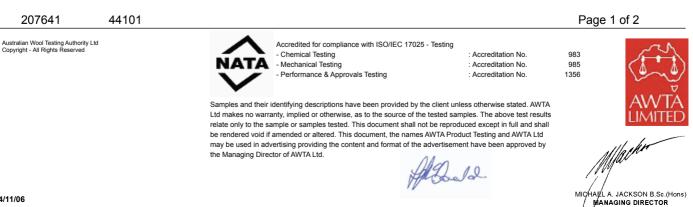

APPROVED SIGNATORY

(C)

Α



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client : Flowcrete Australia Unit 2, 41 Deakin Street Brendale QLD 4500

Test Number	:	20-002324
Issue Date	:	2/07/2020
Print Date	:	2/07/2020

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Each specimen was clamped to a substrate of 6mm thick fibre reinforced cement board prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

No directional properties, three specimens tested only.

207641

44101

© Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing - Chemical Testing - Mechanical Testing - Performance & Approvals Testing

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by

: Accreditation No. : Accreditation No. : Accreditation No. Page 2 of 2

983

985

1356





the Managing Director of AWTA Ltd.

APPROVED SIGNATORY